


PNP Plastic-Encapsulate Transistor

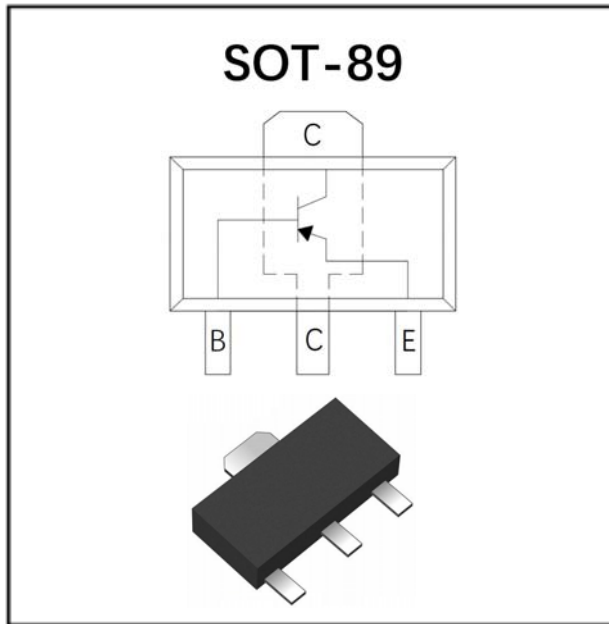

Features

- Epoxy meets UL-94 V-0 flammability rating
- High power dissipation capability
- Exposed heatsink for excellent thermal and electrical conductivity
- Part no. with suffix "Q" means AEC-Q101 qualified

Application

- Linear voltage regulators、Low-side switches
- Battery-driven devices、MOSFET drivers
- Amplifiers

Mechanical Data

- **Package:** SOT-89
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:** AM.

■Maximum Ratings (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Value
Minimum Collector-Emitter Voltage	V_{CE0}	V	-60
Minimum Collector-Base Voltage	V_{CBO}	V	-60
Minimum Emitter-Base Voltage	V_{EBO}	V	-5
Collector Current	I_C	A	-1
Collector Power Dissipation ^(*)	P_C	mW	500
Thermal Resistance From Junction To Ambient ^(*)	$R_{\theta JA}$	°C/W	250
Operation Junction Temperature	T_j	°C	-55 to +150
Storage Temperature	T_{stg}	°C	-55 to +150

(*) Device mounted on FR-4 PCB 1.0 x 1.0 x 0.06 inch.



BCX52-16Q

■Electrical Characteristics (Ta=25℃ unless otherwise noted)

Item	Symbol	Unit	Conditions	Min	TYP	Max
Collector-Emitter Voltage	V_{CEO}	V	$I_C = -10mA, I_B = 0$	-60		
Collector-Base Voltage	V_{CBO}	V	$I_C = -100\mu A, I_E = 0$	-60		
Emitter-Base Voltage	V_{EBO}	V	$I_E = -100\mu A, I_C = 0$	-5		
Collector-Base cut-off current	I_{CBO}	nA	$V_{CB} = -30V$			-100
Emitter-Base cut-off current	I_{EBO}	nA	$V_{EB} = -5V$			-100
DC Current Gain	h_{FE}		$V_{CE} = -2V, I_C = -5mA$	63		
	h_{FE}		$V_{CE} = -2V, I_C = -150mA$	100		250
	h_{FE}		$V_{CE} = -2V, I_C = -500mA$	40		
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	V	$I_C = -500mA, I_B = -50mA$			-0.5
Base-Emitter Voltage	V_{BE}	V	$V_{CE} = -2V, I_C = -500mA$			-1
Transition Frequency	f_T	MHz	$I_C = -10mA, V_{CE} = -5V, f = 100MHz$		50	

■Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BCX52-16Q	F2	Approximate 0.055	1000	8000	32000	7" reel

■Characteristics (Typical)

Fig.1 - Static characteristic

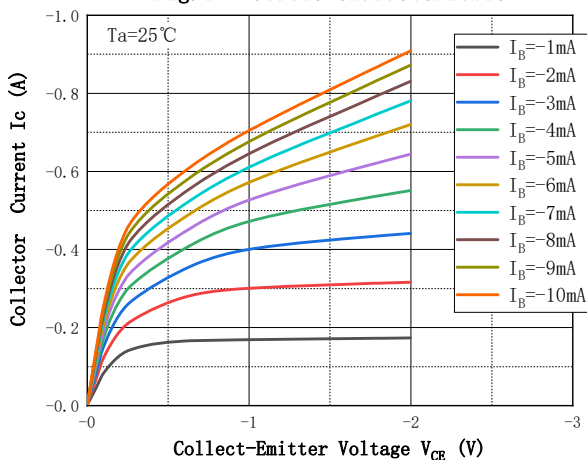


Fig.2 - DC Current Gain

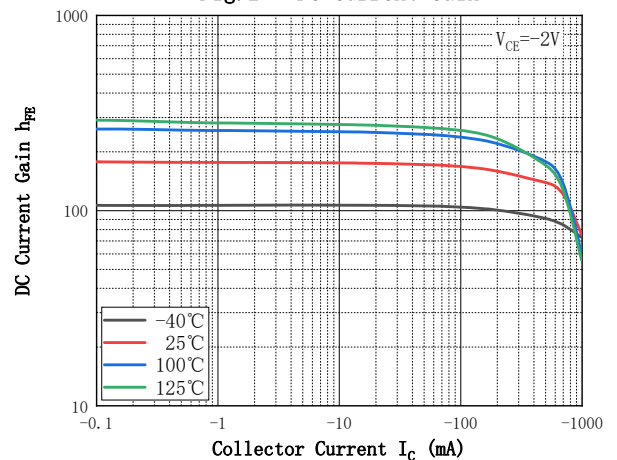




Fig.3 - Collect-Emittor Saturation Voltage

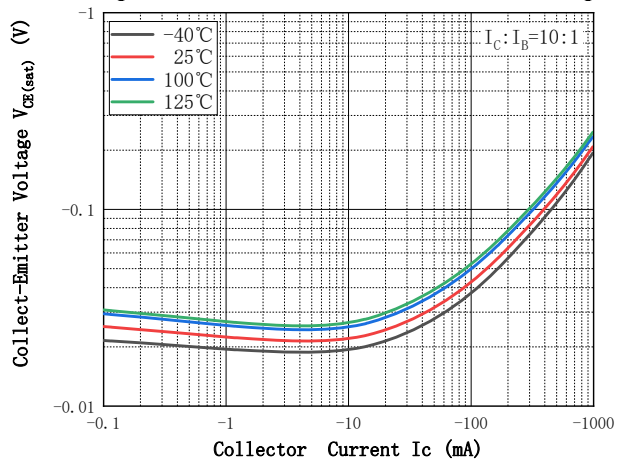


Fig.4 - Base-Emittor Voltage

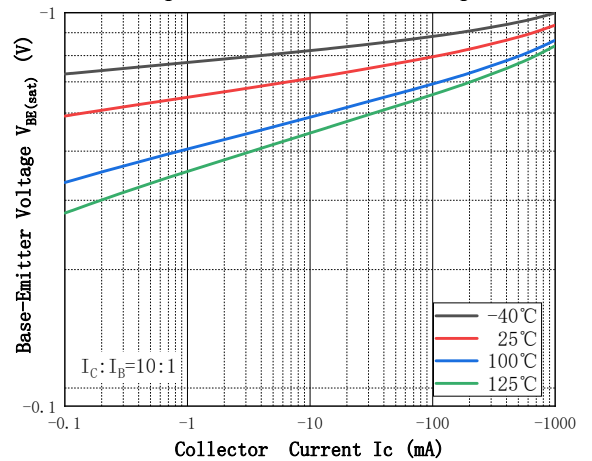


Fig.5 - Base-Emittor On Voltage

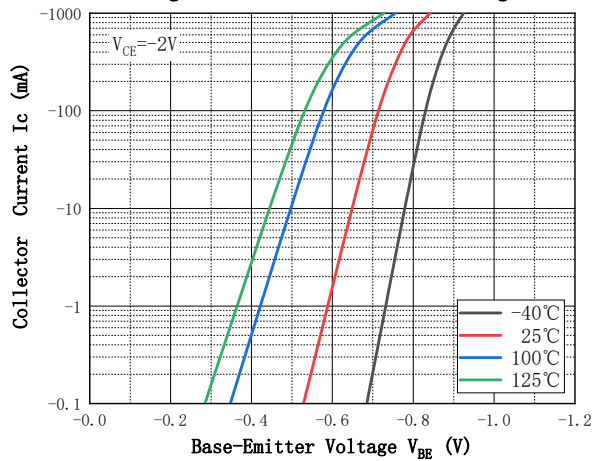


Fig.6 - Cob/Cib—VCB/VEB


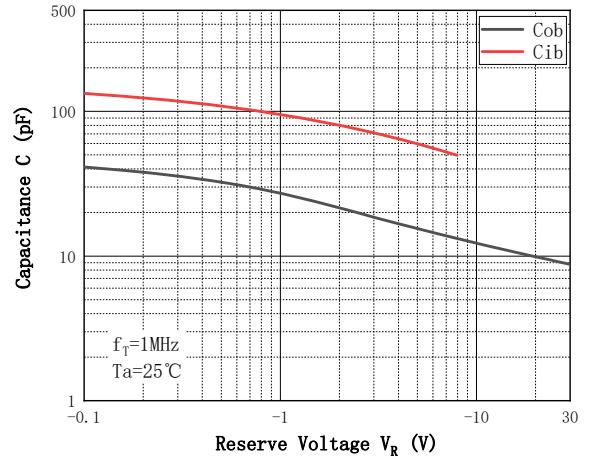



Fig.7 - Power Derating Curve



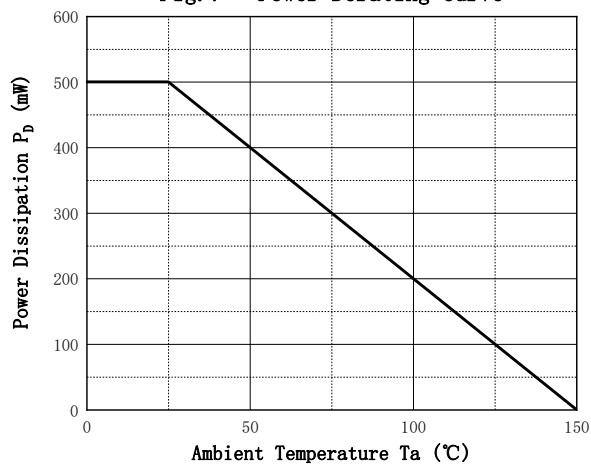


BCX52-16Q

■SOT-89 Package Outline Dimensions



BOTTOM VIEW




SIDE VIEW



SIDE VIEW

DIMENSIONS				
DIM	INCHES		MM	
	MIN.	MAX.	MIN.	MAX.
A	0.173	0.181	4.400	4.600
B	0.061 TYP.		1.550 TYP.	
C	0.155	0.167	3.940	4.250
D	0.031	0.047	0.800	1.200
E	0.094	0.102	2.400	2.600
F	0.118 TYP.		3.00 TYP.	
G	0.014	0.019	0.360	0.480
H	0.017	0.022	0.440	0.560
J	0.014	0.017	0.350	0.440
K	0.055	0.063	1.400	1.600
L	0.059 TYP.		1.500 TYP.	
M	0.108 TYP.		2.750 TYP.	

■SOT-89 Suggested Pad Layout

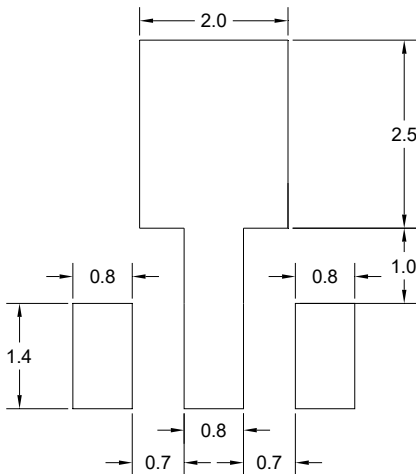

UNIT:MM

SUGGESTED SOLDER PAD LAYOUT



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, life-sustaining, or military. Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.